

Ikegami

TOSHIBA
Leading Innovation >>>

GFTM CAM

TAPELESS CAMERA HDS-V10




Concept

FLASH MEMORY TECHNOLOGY


High speed, non-volatile, semiconductor devices (Flash RAM) are used for the recording media. Better than average reliability is achieved by the use of advanced Flash Memory technology such features as Memory Management, Error Correction (ECC) and Wear-Leveling.

- High Capacity NAND Flash Memory (SLC)
- High Speed Random Access
- Overwrite: 100,000 times and 10 years over Archive Life
- Superb durability against vibration and impact because of no moving parts inside.




OPEN SOLUTION

The GF series is designed around the popular MPEG-2 HD LONG GOP 50Mbps/1 frame 100Mbps Codec and MXF File Format, which conforms to SMPTE Standards and assures compatibility with Non-linear Editor (NLE), and various tapeless systems.



WORKFLOW INNOVATION


By incorporating an open MPEG2 MXF compression format and the high speed data access capabilities of FLASH RAM, the GF series products integrate easily into today's file based workflows. The Gigabit Ethernet connectivity of the GFSTATIONTM, GFSTATIONTM PORTABLE, and GFPLAYER further enhance the ability to provide faster than real time file transfer over currently used network infrastructures.

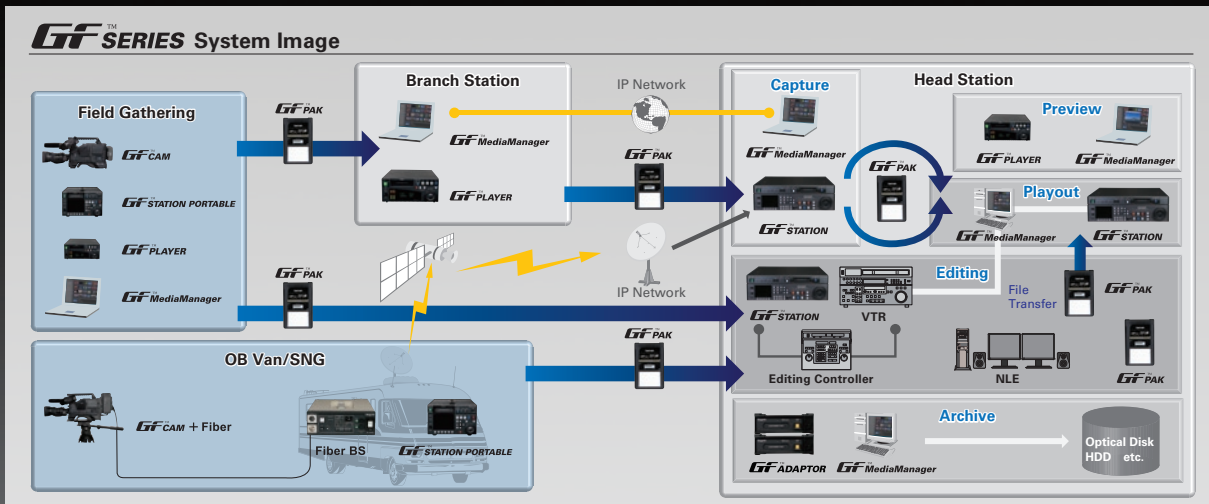

FLASH MEMORY PACK **GF PAK**TM



GFPAKTM media is available in three capacities, 16GB/32GB/64GB. High speed data transfer, recording, and playback are achieved via the on-board SATA connector which complies with life-cycle testing of at least 30,000 cycles.



An industry standard USB 2.0 interface is also used for direct connection to PC devices. A Bistable Nematic LCD display is included to indicate remaining available capacity of the GFPAKTM. This unique LCD display does not require any power to be visible, thus the GFPAKTM does not contain an internal battery.

■ Recording Time (Unit: Minutes)

| Capacity | MPEG-SD | | | MPEG-HD | |
|-------------|----------------|----------------|----------------|-----------------|-----------------|
| | I frame 30Mbps | I frame 40Mbps | I frame 50Mbps | LONG GOP 50Mbps | I frame 100Mbps |
| GFP-16 16GB | 50 min. | 37 min. | 30 min. | 30 min. | 15 min. |
| GFP-32 32GB | 100 min. | 75 min. | 60 min. | 60 min. | 30 min. |
| GFP-64 64GB | 200 min. | 150 min. | 120 min. | 120 min. | 60 min. |

Makes HD Production Circumstance clear and functional

GFTM INNOVATION



1920 x 1080 (1080i) Full HD
1280 x 720 (720p) Full HD
4:2:2 Digital Component REC/PLAY
2000lx/F11 S/N58dB

GFTM CAM TAPELESS CAMERA HDS-V10

1920 x 1080(1080i) Full HD / 1280 x 720 (720p) Full HD 4:2:2 Digital Component Recording

Adopts MPEG-2 4:2:2P@HL Codec for video compression. LONG GOP 50Mbps or I frame only 100Mbps are selectable and support full HD(1920 x 1080[1080i], 1280 x 720[720p]. HDTV REC/PLAY at 4:2:2 color sampling reproduces superb HDTV video to ensure high quality News Production. Not only high quality video, but also uncompressed Audio (Stereo), Time code and Metadata can be recorded.

Moreover, the latest programmable DSP technology allows future upgrade of the Codec to adopt to new compression systems. This feature insures future proofing of the GF series product.




Programmable DSP


Low Noise and High Sensitivity

Employs 2/3-inch CCD's at 2.3M pixel for 1080i* or 1.0M pixel for 720p*. Video processing technology adopted from Ikegami's Hi-end HD Studio cameras achieves superb video reproduction. Low noise S/N: 58dB and high sensitivity 2000lx/F11 specifications, combined with unique video processing technology which makes noise inconspicuous as compared to traditional methods. And up to 1 second frame accumulation expands shooting opportunity in the harsh environment.

*Two Camera Versions are Available



2.3M Pixel CCD(1080i)



Digital Process LSI, ASIC

■ Inconspicuous noise at the gain-up

Unique video processing combining analog gain-up and digital gain-up makes noise inconspicuous and provides low noise video reproduction.

■ +54 ~ -3dB gain-up selectable

Custom video processing circuit insures true color reproduction under high gain conditions for superior low light performance. Selectable gain steps from -3dB to +54 dB Hyper gain are provided for field versatility. An optional -6dB gain position provides higher S/N ratio when operating under extreme highlight conditions, thus expanding flexibility during field operations.

ENG Conscious Mobility and Operability

Quick Start Recording

Recording starts within 3 seconds after power-on to minimize loss of fast action material.



Recording starts ① •• ② •• ③ within 3 seconds

Additional Recording Features

Retro-loop Recording : By using the internal cache memory, up to 25 seconds video can be recorded before pressing REC button.

Loop Recording : Continuous recording with single GFFPAK™.

Time Lapse Recording : Variable record interval and frequency for time lapse capture.

Animation Recording : Single video frames are recorded for each push of the REC button.

Good Weight Balance

Precision weight balance is achieved by both the designed lower center of gravity camera head, and an adjustable, concave surface shoulder pad. Proper balance insures stable recorded video images, and less operator fatigue.



SP-002(Slide Type: Standard)



SP-001(Fixed type: Option)

PAK-less Recording

Employs internal cache memory.

Video images along with audio and time code are recorded to an internal cache memory before being sent to the GFFPAK™. Cache recording continues after the GFFPAK™ is removed and is transferred once a fresh GFFPAK™ is inserted allowing for "Hot Swapping" of the GFFPAK™ media.

Up to 25 seconds of PAK-less recording insures continuous video capture without breaks in content or time code.



Quick Setup

Dedicated switches as well as programmable P.FUNC (personal function) buttons provide direct access to commonly used menu items to speed set-up time.

Master reference and scene file type data are easily stored in any of 10 User Files for quick selection of pre-programmed video "Looks".

User File data is retained in camera head memory and can also be imported / exported to external FLASH memory via the on-board USB 2 port.



PFUNC Button



Shortcut Menu Button

Light Weight and Durability


The magnesium alloy camcorder body provides light weight operability and strong, long life durability to hold up under the harsh rigors of News gathering field operations. GFFPAK™ media is designed for greater immunity to vibration, impact, and temperature variation than that of existing spinning disc, or previous tape type media.

Use with Existing Ikegami Camera Systems and Accessories

Studio Application with Fiber Extension System

By attaching FE-C100A/FE-C10 Fiber Camera Adaptor, HD-SDI and 2-ch Audio signals can be transmitted up to 2km*. FE-B100A/FE-B10 Base Station can transmit RET(HD-SDI), Intercom, Genlock and Tally signals to camera head, thus expanding the system capabilities of GFCAM™.

*FE-C10 + FE-B10 : Up to 200m

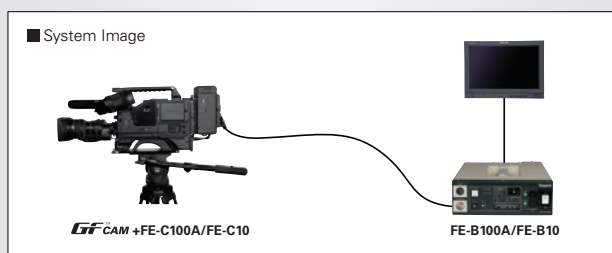

Film-like Production Support (Option)

Optional 23.98p, 25p and 20.97p recording and Film-like Gamma is available for supporting Film-like production of Commercial Video, Drama and Electronic Cinematography material.


Optional Accessories



Fiber Camera Adaptor FE-C100A/FE-C10 Base Station FE-B100A/FE-B10



Remote Control Box RCP-50B



Remote Control Unit RM-S1A



9-inch Viewfinder VFL900HA

3.5-inch Color LCD Monitor

Employs 3.5-inch Color LCD Screen to indicate setup status, Thumbnail pictures and playback video.



Status Page :
Recording Standby



Status Page :
Playback



Thumbnail Page

Quick Browse Function

By using the Rotary Encoder on the camera front panel, Jog Dial like playback control is possible. In accordance with footage length, 1 frame through 30 minutes of playback control is available*. Midway of footage can be accessed immediately. And the Cue point can be set accurately.

*15 Frame minimum at Long GOP mode



Rotary Encoder

Shot Mark and Check Mark Function

Simple "Cuts Type" editing may be performed in the camera by marking IN & OUT points on recorded clips, and merging these edited clips onto a user defined "PLAYLIST". Clips may also be "Check Marked" at will and then filtered as such later for easy viewing or editing.

Shot Mark Browse Function

Shot Mark Points added to recording / playback video can be displayed as a thumbnail icons. Marked points can be playback easily and immediately.



PLAYLIST Editing/Playback Function

By marking IN/OUT points, each clip can be registered for a selected PLAYLIST. Upon completion of a PLAYLIST, IN/OUT points can be changed. Afterwards, the completed PLAYLIST can be edited and played back by the GFSTATION™ or an NLE.



PLAYLIST Main Page



IN/OUT Point Marking Page



IN/OUT Point Editing Page

USB2.0 Interface

The camera's USB 2.0 interface has many functions. Metadata such as record date, location, photographer name, program name and/or camera number can be input, and Proxy Video (Option) can be exported to an external memory device. Moreover, all of camera firmware can be updated from USB Memory.



Salvage Function

In case of clip data damaged by unexpected power off etc., a SALVAGE function is available to rebuild the clip database with minimum loss of recorded material.

*Salvage may not be available if data damage is serious.



Open and User Friendly Editing Interface

Direct Connection with Non-linear Editor (NLE)

GFPAK™ employs universal interfaces, both USB2.0 and SATA (Serial Advanced Technology Attachment) for PC connection. No special docking adapter is necessary for direct connection of the GFPAK™ to an NLE as a mounted drive.

High speed access of a GFPAK™ is achieved via these interfaces for direct editing without the need to copy recorded material to local storage.



Open Format



GF series products use the open compression format MPEG-2 LONG GOP 50Mbps & I frame only 100Mbps with popular MXF File Format. Utilization of these popular compression formats allows for fast and easy integration of GF recordings to popular NLE platforms without the need for time consuming file conversions.

Media Asset Management

Media Asset Management can be achieved with the GF MediaManager software. The logging of GFPAK™ S/No., recorded clips and Metadata (photographer name, shooting location and date etc.), as well as copying of recorded material between the GFPAK™ and external storage is easily and efficiently achieved.



GF MediaManager


Rating / Performance

| | |
|-----------------------------------|---|
| Power Consumption | Camera 40W *1 VF 5W *1 |
| Operating Temperature | -5 ~ +40 °C |
| Guaranteed Temperature | 0 ~ +40 °C |
| Storage Temperature | -20 ~ +60 °C |
| Operating Humidity | 10 ~ 80% (Without Condensation) |
| Dimensions | 130 x 215 x 310mm (W/H/D, Except Protruding) |
| Weight | 4.5kg (Camera Head) |
| ■ Capturing Portion | |
| Image Sensor | 2/3-inch 2,300,000 Pixel, 3x AIT CCD (1920 x 1080 Effective Pixel) 2/3-inch 1,000,000 Pixel, 3x IT CCD (1280 x 720 Effective Pixel) |
| Optical Filter | CC: 3200K, 4300K, 6300K, CROSS ND: CLEAR, 25%, 6.3%, 1.6% |
| Scanning System | 1080 59.94i/50i [23.98P/25P/29.97P(Optional)] [480i, 576i available with Format Converter] 720 59.94P/50P [29.97P/25P(Optional)] |
| Scanning Frequency | 50Hz/59.94Hz (Customer's choice at the order / Switchable: Option) |
| Limiting Resolution | 1000TVL (1080i Version) / 700TVL (720p Version) |
| Sensitivity | F11 / 2000lx |
| S/N Ratio | 58dB (1080i Version) / 56dB (720p Version) |
| Gain-up | -6i(Optional), -3, 0, +3, +6, +9, +12, +18, +24, +30, +42, +54dB |
| Electric Color Temperature | 3200K / 5600K |
| Electric Shutter | Preset Shutter: 1/100, 1/120, 1/250, 1/500, 1/1000, 1/2000 Variable Shutter: 1080/59.94i: 1/63.4 ~ 1/1980 1080/50i: 1/52.9 ~ 1/1650 720/50p: 1/51.3 ~ 1/2080 720/60p: 1/61.5 ~ 1/2490 |
| Function | CCD Frame Accumulation |

| | |
|--------------------------|---|
| ■ Interface | |
| ● Input | |
| Timecode(TC) | SMPTC 12M 2.0Vp-p |
| Video Signal | SDI (HD/SD) 1ch / Composite: Future Option (Except for EU market) BBS 0.45Vp-p, ±6dB or Tri-level Sync 0.6Vp-p ±6dB BNC 75Ω 1ch |
| External Sync(GL) | 4ch (Selectable from Front Microphone, REAR-1, REAR-2, Unislot) |
| Audio Signal | Front Microphone: Stereo (Standard), Monaural: Option -60/-40dBu (Menu Selection) +48V Phantom ON/OFF (Menu Selection) XLR 5-pin [3-pin (Monaural 3-pin: Option)] |
| Front Microphone | LINE/MIC/MIC+48V selectable LINE: 0 / +4dBu (Menu Selection) MIC: -60 / -40dBu (Menu Selection) MIC+48V: Phantom+48V -60 / -40dBu (Menu Selection) |
| REAR-1, REAR-2 | XLR 3pin 2ch -40dBu D-SUB 25 pin |
| Unislot | |
| ● Output | |
| SDI | HD: SMPTE 292M Conformity SD: SMPTE 259M Conformity From BNC Connector from Camera Head / Supports Embedded Audio 1Vp-p 75Ω Composite or SDI(HD/SD) *2 From BNC Connector on Camera Head +12V (11 ~ 17V), 1A Current Typical |
| Monitor | Mini-Jack Type 1ch SMPTC 12M 2.0Vp-p |
| DC | +12V (+11 ~ +17V), Available at Battery Operation |
| Earphone | 1ch (Host, Conforming USB2.0) |
| TC | 1Vp-p 75Ω, Y(PB PR)/RET Selectable |
| Power for Light | To VF Connector |
| USB | (PB PR) is output only for Color Viewfinder Outputs CH1, CH2 or CH3, CH4 selected |
| VF Video | 0 / +4dBu 1ch, Outputs to XLR Connector on Camera |
| Audio | |

*1 Target Spec. *2 Default: SDI / HD or SD: Menu Selection

GF SERIES



Flash Memory Pack
GF PAK




Flash Memory Recorder
GF STATION



Portable Flash Memory Recorder
GF STATION PORTABLE



Portable Flash Memory Player
GF PLAYER

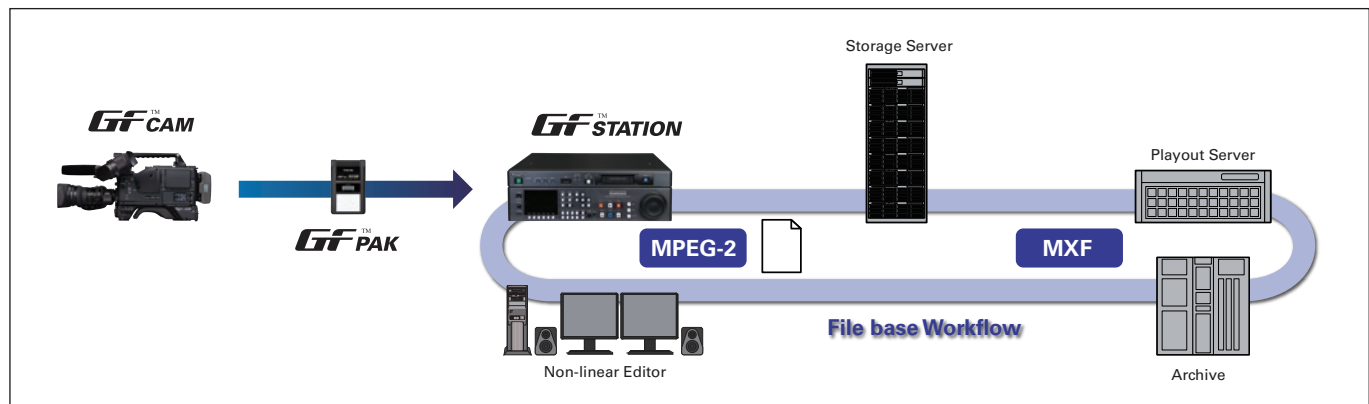

Design and specifications are subject to change without notice.

● GF is trademarks of Ikegami and Toshiba.
● GF SERIES is co-developed product of Ikegami and Toshiba.

H161A094-HA2 Printed in Japan

Ikegami IKEGAMI ELECTRONICS (U.S.A.), INC.

■ URL <http://www.ikegami.com>

| | |
|--------------------------|---|
| HEADQUARTERS | 37 BROOK AVENUE, MAYWOOD, NJ 07607 Phone:(201)368-9171 Fax:(201)569-1626 |
| WEST COAST OFFICE | 2631 MANHATTAN BEACH BLVD., REDONDO BEACH, CA 90278 Phone:(310)297-1900 Fax:(310)536-9550 |
| SOUTHWEST OFFICE | 773 BEARDEN WAXAHACHIE, TX 75167 Phone:(972)869-2363 Fax:(972)556-1057 |
| MIDWEST OFFICE | 747 CHURCH ROAD, UNIT C1, ELMHURST, IL 60126 Phone:(630) 834-9774 Fax:(630)834-8689 |
| SOUTHEAST OFFICE | 5200 N.W. 33RD AVENUE, SUITE 111 FORT LAUDERDALE, FL 33309 Phone:(954)735-2203 Fax:(954) 735-2227 |

